



# Killean Wind Farm

## Technical Appendix 11.6: Suggested Planning Conditions

---

Author	Artem Khodov
Date	28 May 2024
Ref	Final

---

This document (the “Report”) has been prepared by Renewable Energy Systems Ltd (“RES”). RES shall not be deemed to make any representation regarding the accuracy, completeness, methodology, reliability or current status of any material contained in this Report, nor does RES assume any liability with respect to any matter or information referred to or contained in the Report, except to the extent specified in (and subject to the terms and conditions of) any contract to which RES is party that relates to the Report (a “Contract”). Any person relying on the Report (a “Recipient”) does so at their own risk, and neither the Recipient nor any person to whom the Recipient provides the Report or any matter or information derived from it shall have any right or claim against RES or any of its affiliated companies in respect thereof, but without prejudice to the terms of any Contract to which the Recipient is party.

- 11.1.1 If the wind farm is successful in its application for planning permission any resulting decision notice would likely contain appropriately worded noise conditions, written so as to be in accordance with Circular 4/1998 The Use of Conditions in Planning Permissions<sup>1</sup>.
- 11.1.2 Such conditions would provide a degree of protection to nearby residents under planning law. To that end, presented below are a set of relevant, precise and enforceable conditions that RES suggest may be considered as appropriate. The form of condition wording suggested has been adopted at sites such as Freasdail<sup>2</sup>, Minnygap<sup>3</sup>, Roos<sup>4</sup>, Solwaybank<sup>5</sup> and Wryde Croft<sup>6</sup>. Any final conditions attached to the proposal would be according to the discretion of the decision maker.
- 11.1.3 The proposed noise limits are derived to meet the ETSU-R-97 limit - a lower limit of 37.5dB(A) or background noise plus 5dB(A) during the day, and 43.0 dB(A) at night. The limits are consistent with those of Tables 11.12 and 11.13 of the Chapter.

### Suggested Planning Condition Wording

1. The level of noise immissions from the combined effects of the wind turbines (including the application of any tonal penalty) when calculated in accordance with the attached Guidance Notes, shall not exceed the values set out in the attached **Table 1** or **Table 2** (as appropriate). Noise limits for dwellings which lawfully exist or have planning permission for construction at the date of this consent but are not listed in the attached Tables shall be those of the physically closest location listed in the Tables unless otherwise agreed with the Local Planning Authority. The coordinate locations to be used in

---

<sup>1</sup> Circular 4/1998, "The Use of Conditions in Planning Permissions", Scottish Government, February 1998

<sup>2</sup> Directorate for Planning and Environmental Appeals, Appeal Decision Notice, Appeal Reference PPA-130-2036, Decision Date: 15 April 2014

<sup>3</sup> Directorate for Planning and Environmental Appeals, Appeal Decision Notice, Appeal Reference PPA-170-2055, Decision Date: 19 June 2014

<sup>4</sup> The Planning Inspectorate, Appeal Decision, Appeal Reference: APP/E2001/A/09/2113076, Decision Date: 21 June 2010

<sup>5</sup> Directorate for Planning and Environmental Appeals, Appeal Decision Notice, Appeal Reference PPA-170-2091, Decision Date: 23 September 2014

<sup>6</sup> The Planning Inspectorate, Appeal Decisions for Appeal References: APP/J0540/A/08/2083801 and APP/J0540/A/08/2090541, Decision Date: 1 April 2010

determining the location of each of the dwellings listed in **Tables 1 and 2** shall be those listed in **Table 3**.

2. Within 21 days from the receipt of a written request from the Local Planning Authority and following a complaint to the Local Planning Authority from the occupant of a dwelling which lawfully exists or has planning permission at the date of this consent, the wind farm operator shall, at the wind farm operators expense, employ an independent consultant approved by the Local Planning Authority to assess the level of noise immissions from the wind farm at the complainant's property following the procedures described in the attached Guidance Notes.
3. The wind farm operator shall provide to the Local Planning Authority the independent consultant's assessment and conclusions regarding the said noise complaint, including all raw data upon which those assessments and conclusions are based. Such information shall be provided within 2 months of the date of the written request of the Local Planning Authority, with an additional 3 weeks allowed should further investigation pursuant to Guidance Note 4 be required, unless otherwise extended in writing by the Local Planning Authority.
4. Wind speed, wind direction and power generation data shall be continuously logged and provided to the Local Planning Authority at its request and in accordance with the attached Guidance Notes within 14 days of such request. Such data shall be retained for a period of not less than 24 months.
5. No development shall commence until there has been submitted to the Local Planning Authority details of a nominated representative for the development to act as a point of contact for local residents (in connection with conditions 1 - 4) together with the arrangements for notifying and approving any subsequent change in the nominated representative. The nominated representative shall have responsibility for liaison with the Local Planning Authority in connection with any noise complaints made during the construction, operation and decommissioning of the wind farm.

## SCHEDULE OF NOISE GUIDANCE NOTES

These notes form part of conditions 1-5. They further explain these conditions and specify the methods to be deployed in the assessment of complaints about noise immissions from the wind farm.

Reference to ETSU-R-97 refers to the publication entitled “The Assessment and Rating of Noise from Wind Farm” (1997) published by the Energy Technology Support unit (ETSU) for the Department of Trade and Industry (DTI).

### Note 1

- (a) Values of the LA90,10min noise statistic shall be measured at the complainant’s property using a sound level meter of EN 60651/BS EN 60804 Type 1, or EN 61672 Class 1 quality (or the replacement thereof) set to measure using a fast time weighted response as specified in BS EN 60651/BS EN 60804 or BS EN 61672-1 (or the equivalent UK adopted standard in force at the time of the measurements). This shall be calibrated in accordance with the procedure specified in BS 4142: 1997 (or the replacement thereof). These measurements shall be made in such a way that the requirements of Note 3 shall also be satisfied.
- (b) The microphone should be mounted at 1.2 - 1.5 m above ground level, fitted with a two layer windshield (or suitable alternative approved in writing from the Local Planning Authority), and placed outside the complainant’s dwelling. Measurements should be made in “free-field” conditions. To achieve this, the microphone should be placed at least 3.5 m away from the building facade or any reflecting surface except the ground at a location agreed with the Local Planning Authority.
- (c) The LA90,10min measurements shall be synchronised with measurements of the 10-minute arithmetic mean wind speed and with operational data, including power generation information for

each wind turbine, from the turbine control systems of the wind farm.

- (d) The wind farm operator shall continuously log arithmetic mean wind speed and arithmetic mean wind direction data in 10 minute periods on the wind farm site to enable compliance with the conditions to be evaluated. The mean wind speed at hub height shall be 'standardised' to a reference height of 10 metres as described in ETSU-R-97 at page 120 using a reference roughness length of 0.05 metres. It is this standardised 10 m height wind speed data which is correlated with the noise measurements of Note 2(a) in the manner described in Note 2(c).


#### Note 2

- (a) The noise measurements shall be made so as to provide not less than 20 valid data points as defined in Note 2 paragraph (b). Such measurements shall provide valid data points for the range of wind speeds, wind directions, times of day and power generation requested by the Local Planning Authority. In specifying such conditions the Local Planning Authority shall have regard to those conditions which were most likely to have prevailed during times when the complainant alleges there was disturbance due to noise.
- (b) Valid data points are those that remain after all periods during rainfall have been excluded. Rainfall shall be assessed by use of a rain gauge that shall log the occurrence of rainfall in each 10-minute period concurrent with the measurement periods set out in Note 1(c) and is situated in the vicinity of the sound level meter.
- (c) Data points considered valid in accordance with Note 2(b) shall be plotted against the corresponding wind speed value determined in accordance with Note 1(d). A least squares, "best fit" curve of 2nd order shall be fitted to the data. In the event that this is a poor fit to the data, a higher (maximum 4th) order polynomial or data binning can be used. The noise level at each integer speed shall be derived from this best-fit curve, or the relevant data bin, as appropriate.

### Note 3

Where, in the opinion of the Local Planning Authority, noise immissions at the location or locations where assessment measurements are being undertaken contain a tonal component, the following rating procedure shall be used.

- (a) For each 10-minute interval for which LA<sub>90,10min</sub> data have been obtained as provided for in Notes 1 and 2, a tonal assessment shall be performed on noise immissions during 2-minutes of each 10-minute period. The 2-minute periods shall be regularly spaced at 10-minute intervals provided that uninterrupted clean data are available. Where clean data are not available, the first available uninterrupted clean 2 minute period out of the affected overall 10 minute period shall be selected. Any such deviations from standard procedure, as described in Section 2.1 on pages 104-109 of ETSU-R-97, shall be reported.
- (b) For each of the 2-minute samples the margin above or below the audibility criterion of the tone level difference,  $\Delta L_{tm}$  (Delta Ltm), shall be calculated by comparison with the audibility criterion, given in Section 2.1 on pages 104-109 of ETSU-R-97.
- (c) The arithmetic average margin above audibility shall be calculated for each wind speed bin where data is available, each bin being 1 metre per second wide and centred on integer wind speeds. For samples for which the tones were below the audibility criterion or no tone was identified, a value of zero audibility shall be substituted.
- (d) The tonal penalty shall be derived from the margin above audibility of the tone according to the figure below. The rating level at each wind speed shall be calculated as the arithmetic sum of the wind farm noise level, as determined from the best-fit curve described in Note 2, and the penalty for tonal noise.

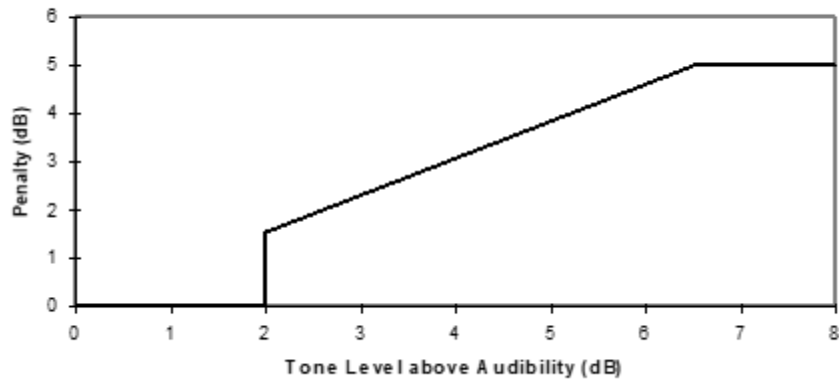

Note 4

If the wind farm noise level (including the application of any tonal penalty as per Note 3) is above the limit set out in the conditions, measurements of the influence of background noise shall be made to determine whether or not there is a breach of condition. This may be achieved by repeating the steps in Notes 1 & 2 with the wind farm switched off in order to determine the background noise,  $L_3$ , at the assessed wind speed. The wind farm noise at this wind speed,  $L_1$ , is then calculated as follows, where  $L_2$  is the measured wind farm noise level at the assessed wind speed with turbines running but without the addition of any tonal penalty:

$$L_1 = 10 \log \left[ 10^{L_2/10} - 10^{L_3/10} \right]$$

The wind farm noise level is re-calculated by adding the tonal penalty (if any) to the wind farm noise.

## TABLE OF NOISE LIMITS RELATING TO CONDITION 1

Table 1: The  $L_{A90,10min}$  dB Wind Farm Noise Level Between 23:00 and 07:00 hours:

House ID	Reference Wind Speed, Standardised v10 (ms-1)											
	1	2	3	4	5	6	7	8	9	10	11	12
H1	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	44.3	47.2	50.4	50.4
H2	45.7	45.3	45.0	44.8	44.7	44.9	45.3	45.9	46.9	48.3	50.1	52.3
H3	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H4	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H5	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H6	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.9	46.9	50.5	50.5
H7	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H8	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H9	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H10	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H11	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H12	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H13	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H14	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.9	46.9	50.5	50.5
H15	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	44.3	47.2	50.4	50.4
H16	45.7	45.3	45.0	44.8	44.7	44.9	45.3	45.9	46.9	48.3	50.1	52.3
H17	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H18	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H19	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.9	46.9	50.5	50.5
H20	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H21	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H22	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H23	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H24	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H26	43.0	43.0	43.0	43.0	43.0	43.5	43.7	43.7	44.0	45.1	47.7	52.3
H27	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
H28	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.4	44.4	46.2	49.1	53.8
H29	43.0	43.0	43.0	43.0	43.0	44.5	45.6	46.6	47.8	49.8	53.2	58.4
H30	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.4	44.4	46.2	49.1	53.8



**Table 2: L<sub>A90,10min</sub> dB Wind Farm Noise Level at all other times:**

House ID	Reference Wind Speed, Standardised v10 (ms-1)											
	1	2	3	4	5	6	7	8	9	10	11	12
H1	35.0	35.0	35.0	35.0	35.0	36.1	37.7	39.5	41.9	44.7	48.3	52.6
H2	35.0	35.0	39.4	43.8	45.7	46.1	45.7	45.2	45.3	46.7	50.4	56.9
H3	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H4	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H5	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H6	35.0	35.0	35.0	35.0	35.3	36.9	38.7	40.7	43.0	45.7	48.8	52.6
H7	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H8	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H9	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H10	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H11	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H12	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H13	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H14	35.0	35.0	35.0	35.0	35.3	36.9	38.7	40.7	43.0	45.7	48.8	52.6
H15	35.0	35.0	35.0	35.0	35.0	36.1	37.7	39.5	41.9	44.7	48.3	52.6
H16	35.0	35.0	39.4	43.8	45.7	46.1	45.7	45.2	45.3	46.7	50.4	56.9
H17	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H18	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H19	35.0	35.0	35.0	35.0	35.3	36.9	38.7	40.7	43.0	45.7	48.8	52.6
H20	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H21	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H22	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H23	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H24	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H26	35.0	35.0	35.2	39.5	41.9	43.0	43.4	43.5	44.1	45.6	48.7	54.0
H27	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0
H28	35.0	35.0	35.0	35.0	36.8	39.4	41.4	43.2	45.0	47.3	50.3	54.4
H29	35.0	35.0	35.0	36.7	40.4	43.0	45.1	46.8	48.6	50.8	53.7	57.7
H30	35.0	35.0	35.0	35.0	36.8	39.4	41.4	43.2	45.0	47.3	50.3	54.4

### TABLE OF COORDINATE LOCATIONS OF PROPERTIES

Note to Table 3: The geographical co-ordinates references are provided for the purpose of identifying the general location of dwellings to which a given set of noise limits applies.

**Table 3: Coordinate locations of the properties listed in Table 1 & 2.**

House ID	Co-ordinates		House ID	Co-ordinates	
	X (m)	Y (m)		X (m)	Y (m)
H1	169202	643733	H16	169345	643214
H2	170052	644958	H17	170275	646018
H3	170784	648436	H18	169948	644450
H4	170662	648110	H19	170671	648123
H5	170598	647455	H20	170781	648430
H6	170398	646706	H21	169662	644282
H7	169614	645142	H22	169781	645912
H8	170699	647843	H23	170750	648410
H9	170710	647555	H24	168865	642759
H10	170335	647053	H26	171862	644779
H11	170811	648499	H27	169076	640647
H12	170302	646052	H28	168583	641452
H13	169001	643377	H29	169985	640844
H14	170098	645411	H30	168927	641953
H15	169652	643944			